



Ground Level Scissor Lift raised position (top) and lowered (bottom)


Alfacon Solutions' GLSL ground level "drive on - drive off" access for pallet trucks & dollies and does not require a pit. The GLSL is a rugged unit, perfectly suited for all types of ergonomic applications & lifting jobs, offering years of maintenance-free service.

STANDARD FEATURES AND CERTIFICATIONS

- Compliant with ANSI MH29.1 standards for industrial scissor lifts
- Remote 1 hp, 120 volt, single phase power pack (requires dedicated 20 amp circuit)
- TENV motor
- Nema 4 motor rated push button controls
- Power pack includes pressure relief valve, check and flow control valve
- Ground and hard chrome solid rod hydraulic cylinders rated at 3,000 psi working pressure
- Velocity fuse fall safe protection
- Abrasion, oil and weather resistant hydraulic hose with 4 to 1 safety factor at 3,000 psi
- Solid steel scissor legs (44,000 psi min. yield)
- Smooth steel platform
- Structural steel base frame
- Ground superior shafting pivot pins
- Lifetime lubricated Teflon coated bushings
- Sealed cam follower rollers
- Safety warning striping on platform sides

OPTIONS

- Higher capacities
- Oversized platforms & bases
- Higher lift heights
- Safety roll off stops
- Guard rails & bridge plates
- Electric toe guards
- Conveyor platforms
- Tilt platforms
- Portability (semi portable)
- 1 - 3 hp 220-575/3/60, 12 - 24v DC
- 1 - 4 hp air motors
- Wash down
- Explosion proof
- Foot pedal controls
- Automated operation
- Accordion curtain enclosures
- Custom finishes (paint or galvanize)
- **Custom designed & built to customer specifications**

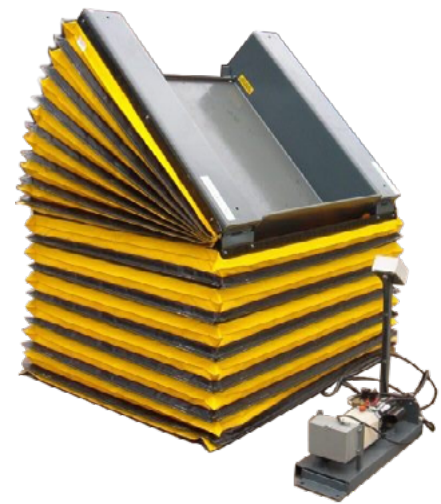

GLSLT - Ground Level Scissor Lift & Tilt Series

MODEL	CAPACITY	PLATFORM	OVERALL PLATFORM	LOWERED HEIGHT	RAISED HEIGHT	UP SPEED	STD. MOTOR	SHIPPING WEIGHT
GLSL - 8	2000 lbs.	44" x 48"	63" x 54"	0"	32"	20 sec.	1 h.p./110 v.	520 lbs.
GLSL - 10	4000 lbs.	44" x 48"	63" x 54"	0"	32"	30 sec.	1 h.p./110 v.	650 lbs.
GLSL - 12	2000 lbs.	48" x 48"	67" x 54"	0"	32"	20 sec.	1 h.p./110 v.	570 lbs.
GLSL - 14	4000 lbs.	48" x 48"	67" x 54"	0"	32"	30 sec.	1 h.p./110 v.	700 lbs.

CONTACT YOUR NEAREST DEALER OR ALFACON SOLUTIONS FOR ENGINEERING & PRICING INFORMATION

